



EN 149:2001+A1:2009 protective devices. Filtering half masks to protect against particles. Requirements, testing, marking

Product:	Filtering half mask for children	
Report No.:	PTC20102904301C-EN01V01	
Client:	Guangdong YiDao Medical Technology Co.,Ltd.	
Client Address:	Room 302, Building 2, No.1, Lane 1, Xiju RoadHengli, Dongguan City, Guangdong Province, P.R.CHINA	
Manufacturer:	Guangdong YiDao Medical Technology Co.,Ltd.	
Manufacturer Address:	Room 302, Building 2, No.1, Lane 1, Xiju RoadHengli, Dongguan City, Guangdong Province, P.R.CHINA	
Contact:	zhang xiu shi	
Model(s):	YD-006	
Classification:	FFP2 NR	
Date of Tests:	2020.11.06~2020.11.13	

Signed for and on Behalf of PTC

Prepare by:

Checked by:

ŝ

FICATION

*

Approved by:

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission



Report No.: PTC20102904301C-EN01V01

Issue Date: Nov.16, 2020 Page 2 of 14

Summary of assessment

Clause	Assessment
7.3 Visual inspection	NOT TESTED
7.4 Packaging	PASS
7.5 Material	PASS
7.6 Cleaning and disinfecting	N/A
7.7 Practical performance	PASS
7.8 Finish of parts	PASS
7.9.1 Total inward leakage	PASS
7.9.2 Penetration of filter material	PASS
7.10 Compatibility with skin	PASS
7.11 Flammability	PASS
7.12 Carbon dioxide content of the inhalation air	PASS
7.13 Head harness	PASS
7.14 Field of vision	PASS
7.15 Exhalation valve	N/A
7.16 Breathing resistance	PASS
7.17 Clogging	N/A
7.18 Demountable parts	N/A
9 Marking	NOT TESTED

Remark:

PASS: comply with requirement of standard N/A: not application NOT TESTED: the clause were not required

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission



7. Ti su 7. P w cc 7. M po A fil	est Result:		
TI SI P W CC 7. M po A fil			
TI SI P W CC 7. M po A fil	Requirement	Test Result	Conclusion
TI SI P W CC 7. M po A fil	.3 Visual inspection		
P w cc 7. M pc A fil	he visual inspection shall also include the marking and the information upplied by the manufacturer.	Not tested	Not tested
P w cc 7. M pe A fil	.4 Packaging		
7. M pe A fil	Particle filtering half masks shall be offered for sale packaged in such a vay that they are protected against mechanical damage and	In accordance with the	Pass
M pe A fil	ontamination before use.	requirement.	
M pe A fil	9 9 9 9 9 9 9 9 9 9 9 9 9 9 9		
pe A fil	.5 Material		
fil A	laterials used shall be suitable to withstand handling and wear over the eriod for which the particle filtering half mask is designed to be used.	No mechanical failure after	
	any material from the filter media released by the air flow through the Iter shall not constitute a hazard or nuisance for the wearer.	undergoing the conditioning described in	Pass
	fter undergoing the conditioning described in 8.3.1 none of the particle Itering half masks shall have suffered mechanical failure of the facepiece r straps.	8.3.1, No collapse when conditioned in accordance with	
	Vhen conditioned in accordance with 8.3.1 and 8.3.2 the particle filtering alf mask shall not collapse.	8.3.1 and 8.3.2.	
-	.6 Cleaning and disinfecting		
lf m	the particle filtering half mask is designed to be re-usable, the naterials used shall withstand the cleaning and disinfecting agents and rocedures to be specified by the manufacturer.	Single shift use only	N/A
_			
Т	.7 Practical performance The particle filtering half mask shall undergo practical performance tes nder realistic conditions	ts No imperfections	Pass
7	.8 Finish of parts		
	Parts of the device likely to come into contact with the wearer shall have	No sharp edges or	Pass
	o sharp edges or burrs.	burrs.	



Report No.: PTC20102904301C-EN01V01

Issue Date: Nov.16, 2020

Page 4 of 14

7.9.1 Total inward leakage

For particle filtering half masks fitted in accordance with the manufacturer's information, at least 46 out of the 50 individual exercise results (i.e. 10 subjects x 5 exercises) for total inward leakage shall be not greater than 25 % for FFP1, 11 % for FFP2, 5 % for FFP3

and, in addition, at least 8 out of the 10 individual wearer arithmetic means for the total inward leakage shall be not greater than 22 % for FFP1, 8 % for FFP2, 2 % for FFP3.

7.9.2 Penetration of filter material

The penetration of the filter of the particle filtering half mask shall meet the requirements of Table 1.

	Sodium chloride test	Paraffin oil test 95
	95 l/min	l/min
FFP1	≤ 20%	≤ 20%
FFP2	≤ 6%	≤6%
FFP3	≤ 1%	≤ 1%

FFP2, Test results are shown in Annex A Table 7.9.1-A&B

Pass

FFP2 , Test results are shown in Annex A Table 7.9.2.

No irritation or

anv other

adverse effect to

health.

Test results are

shown in Annex A

Table 7.11.

Test results are

shown in Annex A

Table 7.12.

Head harness can

be donned and

removed easily, adjustable or

self-adjusting and

Pass

Pass

Pass

Pass

Pass

7.10 Compatibility with skin

Materials that may come into contact with the wearer's skin shall not be known to be likely to cause irritation or any other adverse effect to health.

7.11 Flammability

When tested, the particle filtering half mask shall not burn or not to continue to burn for more than 5 s after removal from the flame.

7.12 Carbon dioxide content of the inhalation air

The carbon dioxide content of the inhalation air (dead space) shall not exceed an average of 1,0 % (by volume)

7.13 Head harness

The head harness shall be designed so that the particle filtering half mask can be donned and removed easily.

The head harness shall be adjustable or self-adjusting and shall be

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission

Precise Testing & Certification (Guangdong) Co., Ltd. (PTC)

Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China.Tel: 86-769-38808222Fax: 86-769-38826111http:// www.ptc-testing.com



Report No.: PTC20102904301C-EN01V01

Issue Date: Nov.16, 2020

Page 5 of 14

Pass

sufficiently robust to hold the particle filtering half mask firmly in position and be capable of maintaining total inward leakage requirements for the device.

7.14 Field of vision

The field of vision is acceptable if determined so in practical performance tests.

7.15 Exhalation valve

A particle filtering half mask may have one or more exhalation valve(s), which shall function correctly in all orientations.

If an exhalation valve is provided it shall be protected against or be resistant to dirt and mechanical damage and may be shrouded or may include any other device that may be necessary for the particle filtering half mask to comply with 7.9.

Exhalation valve(s), if fitted, shall continue to operate correctly after a continuous exhalation flow of 300 l/min over a period of 30 s.

When the exhalation valve housing is attached to the faceblank, it shall withstand axially a tensile force of 10 N applied for 10 s.

7.16 Breathing resistance

S. 18	Maximum permitted resistance (mbar)							
Classification	Inha	Exhalation						
- 67 67	30 l/min	95 l/min	160 l/min					
FFP1	0.6	2.1	3.0					
FFP2	0.7	2.4	3.0					
FFP3	1.0	3.0	3.0					

FFP2. Test results are shown in Annex A Table 7.16.

Pass

7.17 Clogging

7.17.2 Breathing resistance Valved particle filtering half masks: After clogging the inhalation resistances shall not exceed: FFP1: 4 mbar, FFP2: 5 mbar, FFP3: 7 mbar at 95L/min continuous flow The exhalation resistance shall not exceed 3 mbar at 160 L/min

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission

 Precise Testing & Certification (Guangdong) Co., Ltd. (PTC)

 Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China.

 Tel: 86-769-38808222
 Fax: 86-769-38826111

 http:// www.ptc-testing.com

\$~ \$~ \$

Single shift use

only.

N/A

Pass the practical performance tests.

have sufficiently

robust to hold the

particle filtering half mask firmly.

8. 8.

No exhalation valve

N/A



Report No.: PTC20102904301C-EN01V01

Issue Date: Nov.16, 2020

Page 6 of 14

continuous flow

Valveless particle filtering half masks After clogging the inhalation and exhalation resistances shall not exceed: FFP1: 3 mbar, FFP2: 4 mbar, FFP3: 5 mbar at 95L/min continuous flow

7.17.3 Penetration of filter material

	Sodium chloride test 95 l/min	Paraffin oil test 95 I/min
FFP1	≤ 20%	≤ 20%
FFP2	≤ 6%	≤6%
FFP3	≤ 1%	≤ 1%

7.18 Demountable parts

All demountable parts (if fitted) shall be readily connected and secured, where possible by hand

9 Marking

9.1 Packaging

The following information shall be clearly and durably marked on the smallest commercially available packaging or legible through it if the packaging is transparent.

9.1.1 The name, trademark or other means of identification of the manufacturer or supplier.

9.1.2 Type-identifying marking.

9.1.3 Classification

The appropriate class (FFP1, FFP2 or FFP3) followed by a single space and then: "NR" if the particle filtering half mask is limited to single shift use only. Example: FFP3 NR, or "R" if the particle filtering half mask is re-usable.

Example: FFP2 R D.

9.1.4 The number and year of publication of this European Standard.9.1.5 At least the year of end of shelf life. The end of shelf life may be informed by a pictogram as shown in Figure 12a, where yyyy/mm indicates the year and month.

 $9.1.6\ {\rm The\ sentence\ 'see\ information\ supplied\ by\ the\ manufacturer',\ at\ }$

least in the official language(s) of the country of destination, or by using

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission

Precise Testing & Certification (Guangdong) Co., Ltd. (PTC)

Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China.Tel: 86-769-38808222Fax: 86-769-38826111http:// www.ptc-testing.com

Not tested

No demountable

parts.

Not tested



Report No.: PTC20102904301C-EN01V01

Issue Date: Nov.16, 2020

Page 7 of 14

the pictogram as shown in Figure 12b.

9.1.7 The manufacturer's recommended conditions of storage (at least the temperature and humidity) or equivalent pictogram, as shown in Figures 12c and 12d.

9.1.8 The packaging of those particle filtering half masks passing the dolomite clogging test shall be additionally marked with the letter "D". This letter shall follow the classification marking preceded by a single space.

9.2 Particle filtering half mask

Particle filtering half masks complying with this European Standard shall be clearly and durably marked with the following:

9.2.1 The name, trademark or other means of identification of the manufacturer or supplier.

manufacturer of supplier.

9.2.2 Type-identifying marking.

9.2.3 The number and year of publication of this European Standard.

9.2.4 Classification

The appropriate class (FFP1, FFP2 or FFP3) followed by a single space and then: "NR" if the particle filtering half mask is limited to single shift use only. Example: FFP3 NR, or "R" if the particle filtering half mask is re-usable. Example: FFP2 R D.

9.2.5 If appropriate the letter D (dolomite) in accordance with clogging performance. This letter shall follow the classification marking preceded by a single space.

9.2.6 Sub-assemblies and components with considerable bearing on safety shall be marked so that they can be identified.

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission



Report No.: PTC20102904301C-EN01V01

Issue Date: Nov.16, 2020

```
Page 8 of 14
```

Annex A: Summarization of Test Data

Table 7.9.1-A: Inward Leakage Test Data

Test specification: EN 149:2001+A1:2009 Clause 8.5

Subject	Sample No.	Condition	Walk (%)	Head Side/side (%)	Head up/down (%)	Talk (%)	Walk (%)	Mean (%)
Shi	1	A.R	4.2	4.4	4.4	5.3	4.3	4.5
्य र	2	A.R	3.9	3.5	3.0	3.5	2.9	3.4
Liu	3	A.R	2.3	2.6	2.6	2.9	2.8	2.6
Liu	4	A.R	2.4	3.0	3.2	3.2	3.6	3.1
Zhang	5	A.R	2.5	2.4	1.8	2.0	2.8	2.3
Xu	6	T.C	2.4	2.1	2.5	2.5	3.0	2.5
Wu	7	T.C	2.6	1.9	2.2	2.6	1.8	2.2
Yu	8	T.C	2.6	2.6	2.7	2.2	3.4	2.7
CLI C	9	T.C	2.5	3.8	4.3	3.3	4.1	3.6
Lu	10	T.C	3.2	3.2	4.2	2.9	3.9	3.5

Table 7.9.1-B: Facial dimension

Subject	Face Length	Face Width	Face Depth	Mouth Width	
Shi	102	127	72	47	
O LI LO	100	116	82	51	
Liu	101	114	73	47	
Liu	104	117	76	46	
Zhang	107	123	84	52	
Xu	98	120	83	54	
Wu	102	113	82	53	
Yu	103	117	84	51	
C . Ki K .	103	116	83	48	
Lu	102	116	74	52	

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission



Report No.: PTC20102904301C-EN01V01

Issue Date: Nov.16, 2020

Page 9 of 14

Table 7.9.2: Penetration of filter material

Test specification: EN 149:2001+A1:2009 Clause 8.11

Aerosol	Condition	Sample No.	Penetration (%)	Assessmen
	6 % % % %	11	0.2	Nº 38 8
6 6 6	As received	12	0.2	0.0
8 8 8 8		13	0.2	8 8 9
0, 0, 0, 0,	0,0,0,0,0	14	0.3	20 20 1
Sodium chloride test	Simulated wearing treatment	15	0.3	8.8.8
1° 1° 2° 3	8 26 26 26 26	16	0.3	8 8 6
		17	0.1	
さくてく		18	0.1	8 8 8
10, 0, 0, 0,	Mechanical strength + Temperature conditioned As received	19	0.1	Deep
S. 3. 3. 3. 3	. 8. 8. 8. 8.	20	1.8	Pass
5° 5° 5° 5	As received	21	1.8	8 8 6
		22	1.8	
8 6 6 4	1 4 4 6 F	23	2.3	8 8 9
Paraffin oil test	Simulated wearing treatment	24	2.3	1. 1. I. I.
r aranın on test	S. S. S. S.	25	2.3	8. 8. 8
8 8 8 8	9% 9% 9% 9% 9% 9	26	1.7	18 8 8 8
	Mechanical strength + Temperature conditioned	27	1.7	
8 6 6 6		28	1.9	8 6 6

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission



Report No.: PTC20102904301C-EN01V01

Issue Date: Nov.16, 2020 Page 10 of 14

Table 7.11: Flammability

Test specification: EN 149:2001+A1:2009 Clause 8.6

Condition	Sample No.	Result	Assessment
	29	No burn	8 6 6 6 6 G
As received	30	No burn	S Such
Tananakan anditianad	31	No burn	– Pass
Temperature conditioned	32	No burn	1 6° 6° 6° 6

Table 7.12: Carbon dioxide content of the inhalation air

Test specification: EN 149:2001+A1:2009 Clause 8.7

Condition	Sample No.	Re	esult (%)	Assessment
S. S. S.	33	0.01	S 10 10 10 1	5 . 15 . 15 . 15
As received	34	0.02	Mean value:	Pass
	35	0.02	0.02	1 6° 6° 6°

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission



Report No.: PTC20102904301C-EN01V01

Issue Date: Nov.16, 2020

Page 11 of 14

Inhalation Exhalation	30 <u>I/min</u> 95 I/min 160		8. ş	0.41	, Ö.											
66	l/min					11 C 1	2	20	0.41	1	2	1	0.41			
Exhalation	160		Ř. –	1.37			× 	1	1.37					1.35		۰
Exhalation	100	А	В	С	D	E	А	В	С	D	E	А	В	С	D	E
Exhauation I/min	l/min	2.11	2.11	2.12	2.11	2.16	2.14	2.16	2.15	2.15	2.15	2.15	2.15	2.14	2.14	2.17
Flow Ra	te		. Ì	39	100	200	e ocu	2.0	40	<u></u>	1			41		1.00
Inhalation 30 I/min 95 I/min 160		1	1	0.37		8	3	3	0.38	8	8	9	19	0.37		2
		2.2	8.3	1.27	8.	10	20	R	1.26	1	1	1	8.3	1.26	8.	ŝ
	160	А	В	С	D	E	Α	В	С	D	Е	А	В	С	D	E
Exhalation	l/min	2.03	2.02	2.00	2.02	2.01	2.02	2.04	2.02	2.02	2.01	2.03	2.02	2.02	2.02	2.01
Flow Ra	te	3.6	e.,;	42	£9	19	10	20	43	5	1	1.0	2.2	44	£ .,	See.
	30 I/min	b:	0.5	0.35	0.	20	10	20	0.35	10	1.2	3 - 2	σ.,	0.35	0	jġ,
Innalation	95 I/min		28	1.10		5	8	8	1.11	8	1		. *	1.13		1
Exhalation	160	А	В	С	D	E	А	В	С	D	E	А	В	С	D	Е
	l/min	1.82	1.81	1.81	1.80	1.81	1.80	1.78	1.78	1.75	1.78	1.77	1.78	1.79	1.77	1.75
E	nhalation Exhalation	Inhalation Vmin 95 Vmin Exhalation 160 I/min Flow Rate Shalation 30 I/min 95 Vmin 95 Vmin 160	Inhalation 30 I/min 95 I/min 95 I/min 160 I/min 2.03 Flow Rate Inhalation 30 I/min 95 I/min 160 I/min 95 I/min 95 I/min 95 I/min 95 I/min 160 A I/min	30 I/min 95 I/min 95 I/min 160 I/min 2.03 2.03 Flow Rate 30 Inhalation 95 I/min 95 I/min 95 I/min 95 I/min 95 I/min 95 I/min 95 I/min	30 0.37 95 1.27 I/min 4 8 C Exhalation 160 1.27 2.03 2.02 2.00 Flow Rate 2.03 2.02 2.00 2.00 1.10 Inhalation 1/min 0.35 95 1.10 Inhalation 160 1.4 8 C Inhalation 160 1.10 1.10 Exhalation 160 A 8 C	$\begin{tabular}{ c c c c c } \hline & & & & & & & & & & & & & & & & \\ \hline 30 & & & & & & & & & & & & \\ \hline $1min$ & 30 & & & & & & & & & & & \\ \hline 95 & & & & & & & & & & & \\ \hline $1min$ & 160 & A & B & C & D & & & & & & & \\ \hline 2.03 & 2.02 & 2.00 & 2.02 & & & & & & & \\ \hline $1min$ & 2.03 & 2.02 & 2.00 & 2.02 & & & & & & & \\ \hline $Flow Rate$ & $$2.02$ & 2.00 & 2.02 & & & & & & & \\ \hline $Flow Rate$ & $$2.03$ & 2.02 & 2.00 & 2.02 & & & & & & \\ \hline $Flow Rate$ & $$2.03$ & 2.02 & 2.00 & 2.02 & & & & & & \\ \hline $Flow Rate$ & $$2.03$ & 2.02 & 2.00 & 2.02 & & & & & & \\ \hline $Flow Rate$ & $$$2.03$ & 2.02 & 2.00 & 2.02 & & & & & \\ \hline $Flow Rate$ & $$$$1.10$ & $$$$$1.10$ & & & & & \\ \hline min & $$$1.10$ & $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$	30 0.37 95 1.27 I/min A B C D E Exhalation 160 A B C D E Flow Rate 2.03 2.02 2.00 2.02 2.01 Flow Rate 42 1.10 1.10 1.10 1.10 Exhalation 160 A B C D E	$\begin{tabular}{ c c c c c c } \hline & & & & & & & & & & & & & & & & & & $	$\begin{array}{c c c c c c c c c c c c c c c c c c c $	$\begin{tabular}{ c c c c c c c c c c c c } \hline & & & & & & & & & & & & & & & & & & $	$\begin{tabular}{ c c c c c c c c c c c } \hline \begin{tabular}{ c c c c c c c c c c c c c c c c c c c$	$\begin{tabular}{ c c c c c c c c c c c c c c c c c c c$	$ \frac{30}{Vmin} + \frac{30}{95} + \frac{0.37}{Vmin} = 0.37 + \frac{0.38}{1.27} + \frac{0.38}{1.26} + \frac{0.38}{1.27} + \frac{0.38}{1.26} + \frac{0.38}{1.26} + \frac{0.38}{1.27} + \frac{0.38}{1.26} + \frac{0.38}{1.27} + \frac{0.38}{1.26} + \frac{0.38}{1.27} + \frac{0.38}{1.26} + \frac{0.38}{1.27} + \frac{0.38}{1.26} + \frac{0.38}{1.$	$ \frac{30}{ V \min} + \frac{30}{95} + \frac{3}{1.27} + \frac{3}{1.26} + \frac{30}{ V \min} + \frac{1}{2.03} + \frac{3}{2.02} + \frac{1}{2.03} + \frac{1}{2.00} + \frac$	$ \frac{30}{ V_{min} } = 0.37 + 0.38 + 0.37 + 0.38 + 0.37 + 0.38 + 0.37 + 0.38 + 0.37 + 0.38 + 0.37 + 0.38 + 0.37 + 0.38 + 0.37 + 0.37 + 0.38 + 0.37 + 0.37 + 0.38 + 0.37 + 0.37 + 0.38 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0$	$ \frac{30}{l/min} = 0.37 + 0.38 + 0.38 + 0.37 + 0.38 + 0.37 + 0.38 + 0.37 + 0.38 + 0.37 + 0.38 + 0.37 + 0.38 + 0.37 + 0.38 + 0.37 + 0.37 + 0.37 + 0.37 + 0.38 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 + 0.37 $

Table 7.16: Breathing resistance (mbar)

A: Facing directly ahead

B: Facing vertically upwards

C: Facing vertically downwards

D: Lying on the left side

E: Lying on the right side

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission



Report No.: PTC20102904301C-EN01V01

Issue Date: Nov.16, 2020 Page 12 of 14

Test	Uncertainty
Total inward leakage	3.8%
Penetration of filter material(NaCl)	3.5%
Penetration of filter material(Paraffin oil)	4.2%
Carbon dioxide content of the inhalation air	4.5%
Breathing resistance(30L/min)	5.2%
Breathing resistance(95L/min)	5.4%
Breathing resistance(160)L/min)	6.0%

Remark: This report supersedes all previous documents bearing the test report number PTC20102904301C-EN01. Report number PTC20102904301C-EN01 was invalid.

Amendments to report		
Version	Date of issue	Changes
TC20102904301C-EN01V01	2020.11.16	1)Client Address 2)Manufacturer Address

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission




Report No.: PTC20102904301C-EN01V01

Issue Date: Nov.16, 2020

Page 13 of 14

Photo(s) of Sample:

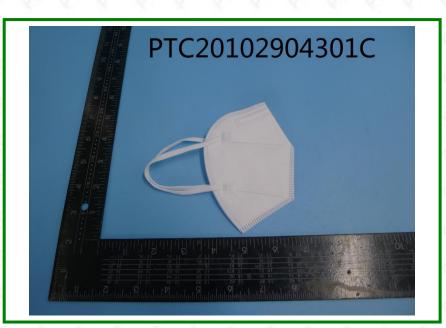




This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission



Report No.: PTC20102904301C-EN01V01

Issue Date: Nov.16, 2020

Page 14 of 14

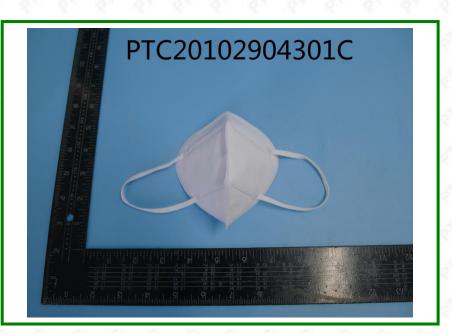



End of Report

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted. The report could not be copied without permission